



Squirrel 2010

A powerful portable data logger

Overview

The Squirrel 2010 is a versatile, general purpose data logger, with 4 to 8 analogue input channels to measure current, voltage, resistance and temperature; plus 8 digital channels to automatically trigger or stop logging. An RS232 port is included, allowing connection to modems and other networking devices.

It is a compact, portable data logger which is also suitable for bench based and fixed installations. Easily programmed via the four integral push buttons and large graphical display and with a basic accuracy of 0.1%, the Squirrel 2010 is able to fulfil many routine data logging needs, including more demanding applications requiring up to 10 readings per second on one channel.



Key features

- » Compact, truly portable data logger
- » 4 to 8 universal analogue inputs (current, voltage, resistance, temperature) plus 8 digital inputs
- » 16 derived / calculated channels
- » 2 alarm outputs and 2 pulse counter inputs (1 at up to 64kHz, 1 at up to 100Hz)
- » Configured via large easy-to-read graphical display
- » 0.1% accuracy of reading
- » Store up to 14 million readings
- » Supplied with SquirrelView set-up / download software


Analogue inputs supported

- » Thermistors
- » Thermocouples
- » Voltage
- » Current
- » Resistance
- » 2-wire Pt100 / Pt1000



- » Flexible
- » Very easy to use
- » Economical
- » Handheld, ergonomic design
- » USB connectivity
- » RS232 output for modem, Ethernet and Wi-Fi connection

- Power output for sensor excitation/external devices
- USB connectivity for quick and easy PC communication
- 4 to 8 universal analogue inputs (4 differential, 8 single ended) for recording temperature, current, voltage and resistance
- Easy to use, removable connector system

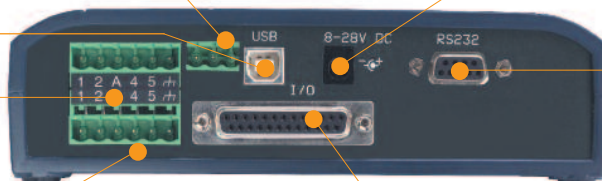

- Power supply – internal alkaline batteries, external DC power supply or via USB
- RS232 connectivity for peripherals communication e.g. Ethernet converter, wi-fi wireless converter or GSM modem
- Range of trigger functions via 8 digital inputs; 2 pulse rate / counter inputs; 2 alarm / relay outputs

- Display of real-time readings on the large clear graphical display
 - Icon driven software and large clear graphical display for easy logger set-up
- 



- Use the four integral push buttons and graphical display to configure the logger – no PC required for operation
- Store up to 14 million readings in the Squirrel's onboard memory
- Store up to 6 logger configurations in the on-board memory
- Use the convenient free SquirrelView set-up and download software to export stored data to your application (see p. 28)

Capabilities

- » Create a wide range of triggers and alarm outputs
- » Review real-time data on the integral display
- » Display readings in preferred engineering units e.g. Hz, Bar, Pascals, Nm etc.
- » Derive up to 16 calculated (virtual) channels from real input channels using mathematical functions

Applications



Environmental



Measurement



Remote outdoor applications

Squirrel 2010 Technical Specifications

| Squirrel SQ2010 | |
|--|--|
| No. of Analogue Channels | 8 single ended or 4 differential inputs |
| Working Environment | - 30 to 65°C, RH up to 95% (non-condensing) |
| Universal Input | Yes |
| Voltage Ranges; Differential and Single Ended | -6V to 25V, -0.6V to 2.4V, $\pm 0.3V$, -0.15V to 0.15V, -0.075V to 0.075V -6V to 12V, -6V to 6V, -3V to 3V, -0.6V to 1.2V, -0.6V to 0.6V |
| Common Mode | 25V |
| Current Ranges, Differential (Requires external 10 Ω shunt) | 4 to 20mA, -30 to +30mA |
| Thermocouple Ranges; Differential and Single Ended | K-type -200 to 1372°C R-type -50 to 1768°C B-type 250 to 1820°C T-type -200 to 400°C S-type -50 to 1768°C C-type 0 to 2320°C N-type -200 to 1300°C J-type -200 to 1200°C D-type 0 to 2320°C |
| Resistance Ranges, all 2 wire | 0 to 1250R, 0 to 5000 Ω , 0 to 300000 Ω , 0 to 20000 Ω |
| Thermistor Ranges | U & UU-type -50 to 150°C Y-type -50 to 150°C S-type -30 to 150°C Customer specific thermistors |
| Pt100/1000, 2-wire | -200 to 850°C |
| Internal Reference Temperature | -50 to 150°C |
| Pulse Count Ranges | 0 to 100Hz (1 input) 0 to 64kHz (1 input) 0 to 16000000 Count |
| Digital State/Event Ranges | 8 state inputs or 1 x 8 bit binary |
| Digital/Alarm Outputs | 2 open drain FETs, 18V, 0.1A |
| A/D Resolution | 24 bit |
| Accuracy | 0.1% of range + 0.1% of reading |
| Clock Resolution/Accuracy | 1s/10ppm Normal Mode – each input sampled at a maximum rate of 1 reading per second. Double-speed (mains reject off) – one input can be sampled at 10 readings per second and all others are sampled at a maximum rate of 1 reading per second |
| No of Intervals | 4 |
| Data Scaling | Yes |
| Data Statistics | Yes from within SquirelView Plus PC software |
| Calculated Channels | Yes, up to 16 |
| Memory Internal | 16Mb (up to 14 million readings) |
| Display/Keypad | 128*64 dot graphical display, 4 button keypad |
| Internal Battery | 2 x C cells |
| Battery Life | Up to 5 days with continuous usage whilst sampling all channels once per second |
| External Power | Yes, 8 to 28V dc & USB when plugged in |
| Sensor Power Output | 5V at 50mA, external 8-28V at 100mA (when connected) |
| Networking | Via RS232 to Ethernet adaptor or RS232 to Wi-Fi adaptor |
| Modem Support | Via RS232 modem (GSM Modem, part no. SQ20A802) |
| Actions & Triggers | Two alarm outputs, fully configurable actions and triggers |
| PC Setup | Yes, SquirelView compatible |
| Front Panel Setup | Via 4 integral 4 keys. All essential functionality available via key pad e.g. channel configuration, start / stop logging etc. Other advanced functions e.g. calculated channels and channel descriptions are available via connection to a PC running SquirelView |
| Stored Setups | 6 |
| Third Party Programming | As 20xx driver suite allows |
| Operating Temperature | -20 to 65°C |
| Dimensions (w x d x h) | 175 mm x 135 mm x 55 mm, Weight 0.7 kg |

Note: supplied with software, SQ2010 manual, USB cable, batteries and 4 current shunt resistors.