



# IMP

## Industrial Pressure Transmitter

- Thick film ceramic sensor
- Accuracy:  $<\pm 0.25\%$  FS BFSL (0.1% optional)
- Pressure ranges from 0.5 to 700 bar
- Gauge, Sealed Gauge or Absolute reference
- Variety of Outputs including mV, Volts and mA

The industrial pressure transmitter, IMP, has a piezo-resistive ceramic pressure sensor giving it excellent media compatibility. The housing is made from stainless steel with a choice of internal O ring seals to select to ensure the product is suitable for a wide range of applications. Every device is temperature compensated and calibrated and supplied with a traceable serial number and calibration certificate. The electronics incorporate a microprocessor based amplifier, this means there are no adjusting pots and therefore the electronics are very stable, especially in high vibration / shock applications.

**There are many options available on the IMP pressure transmitter. These include the following :**

- Pressure range and engineering units
- Pressure reference (G, SG or Abs)
- Output
- Accuracy (Non-linearity & hysteresis)
- Thermal accuracy
- Electrical connection
- Process connection
- Process connection material
- O ring seal material

**Suitable for the following applications:**

- Hydraulics
- Pneumatics
- Autoclave & Sterilisation
- Agricultural machinery
- Laboratory testing
- Mechanical engineering
- Environmental engineering
- Automotive testing
- Tank gauging
- Pumps & compressors
- HVAC

IMP Industrial Pressure Transmitter

IMP Industrial Pressure Transmitter



## Industrial Pressure Transmitter

## Input Pressure Range

Nominal pressure, Gauge	Bar	0.5	1	2	5	10	20	50	100	250	400	600	700
Nominal pressure, Absolute & SG	Bar	0.5	1	2	5	10	20	50	100	250	400	600	700
Compound Range	Bar	-	-1...0 <sup>1)</sup>	-1...2 <sup>1)</sup>	-1...5	-1...9	-1...19	-1...29	-	-	-	-	-
Permissible Overpressure	Bar	1	2	4	10	20	40	100	200	400	650	880	880
Burst Pressure	Bar	2	4	5	12	25	50	120	250	500	650	880	880

<sup>1)</sup> <±0.1% / FS (BFSL) accuracy not possible in this range

## Output Signal &amp; Supply Voltage

Wire system	Output	Supply Voltage
2-wire	4 - 20mA	9 – 32V dc
3-wire	0 – 5V dc	9 – 32V dc
	0 – 10V dc	13 – 32V dc
	1 – 5V dc	9 – 32V dc
	1 – 10V dc	13 – 32V dc
	1 – 6V dc	9 – 32V dc
	0 – 6V dc	9 – 32V dc
	0.5 to 4.5V dc	5V dc
4-wire	Passive mV/V (un-rationalised)	2 – 30V dc
	2mV/V (rationalised)	2 – 30V dc
	10mV/V (amplified)	3 – 12V dc

## Performance

Accuracy (Non-linearity & hysteresis)	<±0.25% / FS (BFSL) <±0.1% / FS (BFSL) optional	
Setting Errors (offsets)	2-wire 3-wire 4-wire	Zero & Full Scale, <±0.5% / FS Zero & Full Scale, <±0.5% / FS see table below
Permissible Load	2-wire 3-wire 4-wire	R <sub>max</sub> = [(V <sub>S</sub> – V <sub>S min</sub> ) / 0.02] Ω R <sub>min</sub> = 10 k Ω R <sub>min</sub> = 11 k Ω
Influence Effects	Supply  Load	mV/V & 0.5 to 4.5V – Ratiometric, other outputs - <0.005 % FS / 1V  0.05 % FSO / kΩ

## Permissible Temperatures &amp; Thermal Effects

Media temperature	-20°C to +135°C (150°C with integrated cooling element)
Ambient temperature	-20° to +80°C
Storage temperature	-40°C to +125°C
Compensated temperature range	+20°C to +80°C
Thermal Zero Shift (TZS)	<±0.04% / FS / °C (option code 4) <±0.02% / FS / °C (option code 2) <±0.01% / FS / °C (option code 1)
Thermal Span Shift (TSS)	<-0.015% / °C

## Industrial Pressure Transmitter

## Electrical Protection

Supply reverse polarity protection	No damage but also no function
Electromagnetic compatibility	CE Compliant

## Mechanical Stability

Shock	100 g / 11 ms
Vibration	10 g RMS (20 ... 2000 Hz)

## Materials

Housing & process connection	303 Stainless Steel 316L Stainless Steel (optional) High Grade DUPLEX Stainless Steel UNS31803 (optional)
'O' ring seals	Viton NBR, Nitrile (optional) EPDM (optional) Chemraz (optional)
Diaphragm	Ceramic Al <sub>2</sub> O <sub>3</sub> 96 %
Media wetted parts	Housing and process connection, 'O' ring seal, diaphragm

## Miscellaneous

Current consumption	2-wire, 3-wire & 4-wire	Limits at 25mA, Typ. 6mA, Typ.2 – 5mA
Weight	Approx. 100g	
Installation position	Any	
Operation Life	> 100 x 10 <sup>6</sup> cycles	
Insulation Resistance	>500M Ω at 50V dc	


## Typical Passive mV/V Outputs

Nominal pressure	Bar	1	2	5	10	20	50	100	250	400	600	700
Output	mV/V	2.0..3.5	2.0..4.0	2.4..4.5	3.6..6.0	2.5..4.0	4.0..6.5	3.1..4.8	3.1..4.8	3.1..4.8	3.7..5.7	4.3..6.7
Zero Setting Error	mV/V	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Span Setting Error	%	30	30	30	30	30	30	30	30	30	30	30


## Wiring Designation

		Small Plug & Socket (Code A)	Large Plug & Socket (Code B)	IP66 Cable (Code C)	AMP 6-pin Bayonet (Code D)	IP68 Vented Cable (Code E)	Binder 6-pin connector (Code F)	M12x1, 4-pin connector (Code G)
2-wire	+ve Supply	Pin 1	Pin 1	Red	Pin 1	Red	Pin 1	Pin 1
	-ve Supply	Pin 2	Pin 2	Blue	Pin 2	Blue	Pin 2	Pin 2
	Ground	Earth Pin	Earth Pin	Green	Earth Pin	White	Pin 3	Pin 3
3-wire	+ve Supply	Pin 1	Pin 1	Red	Pin 1	Red	Pin 1	Pin 1
	-ve Supply	Pin 2	Pin 2	Blue	Pin 2	Blue	Pin 2	Pin 2
	+ve Output	Pin 3	Pin 3	Green	Pin 3	White	Pin 3	Pin 3
	Ground	Earth Pin	Earth Pin	Yellow	Earth Pin	Yellow	Pin 4	Pin 4
4-wire	+ve Supply	Pin 1	Pin 1	Red	Pin 1	Red	Pin 1	Pin 1
	-ve Supply	Pin 2	Pin 2	Blue	Pin 2	Blue	Pin 2	Pin 2
	+ve Output	Pin 3	Pin 3	Green	Pin 3	White	Pin 3	Pin 3
	-ve Output	Earth Pin	Earth Pin	Yellow	Pin 4	Yellow	Pin 4	Pin 4


## Electrical Connections

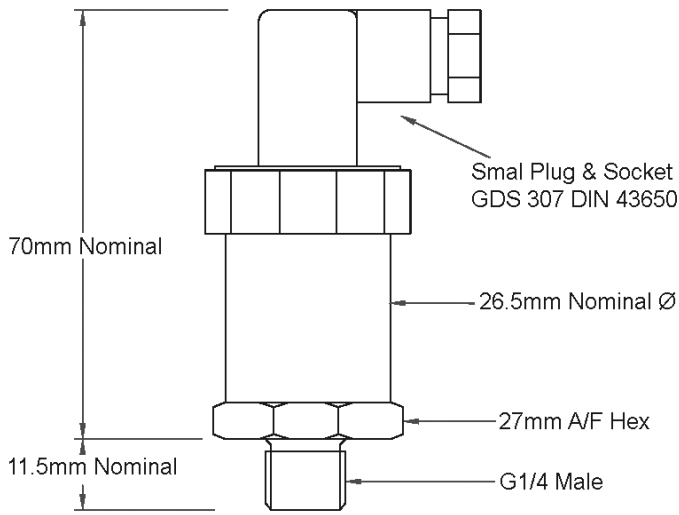


**Small Plug & Socket**  
IP65, GDS 307 DIN 43650 Ø

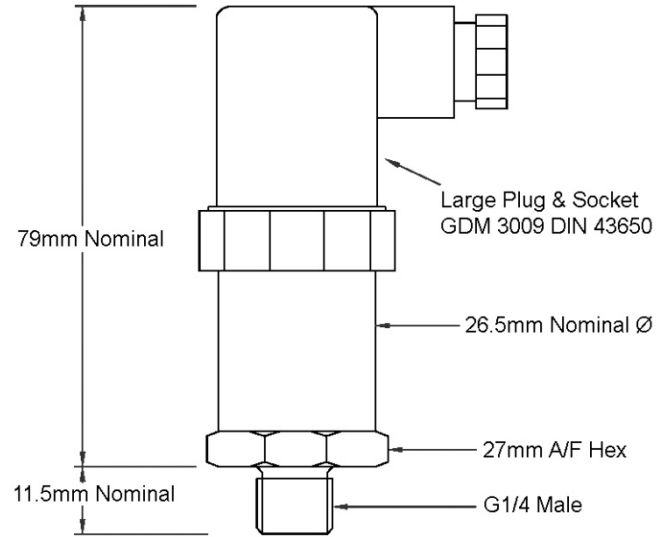

**Large Plug & Socket**  
IP65, GDM 3009 DIN 43650

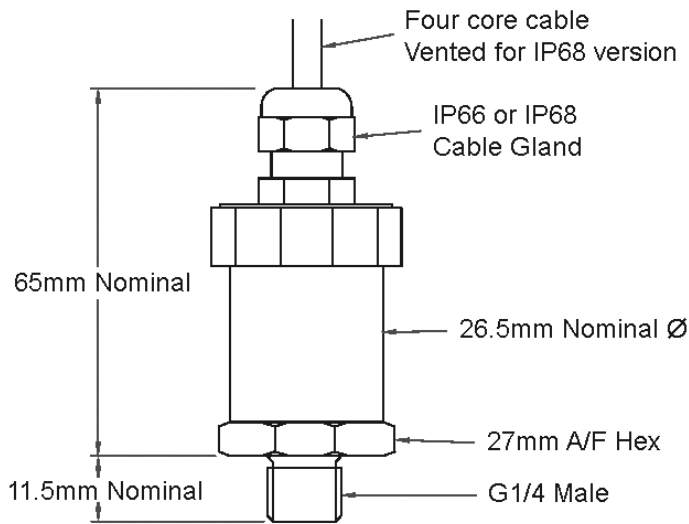

**Cable Gland Assembly**  
IP65 gland, screened PVC industrial cable

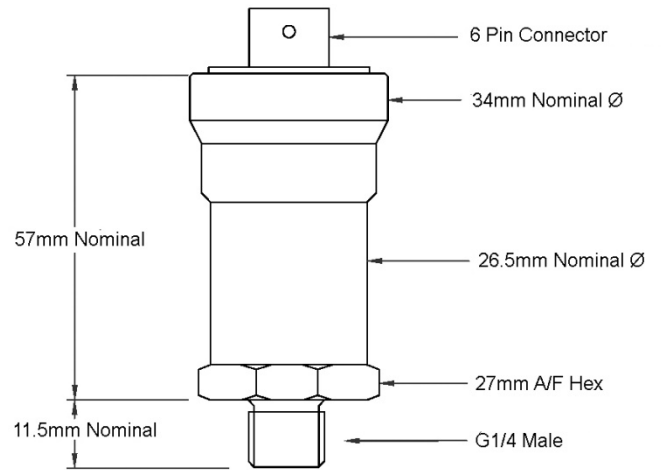

**Amphenol Connector**  
6 pin, IP67, IP54 on gauge versions

## Suggested Accessories



**PA 430**  
in head display and switching device



**SPS-24**  
Din rail power supply



**dTrans**  
Signal conditioner and switching device